



INSTRUCTIONS

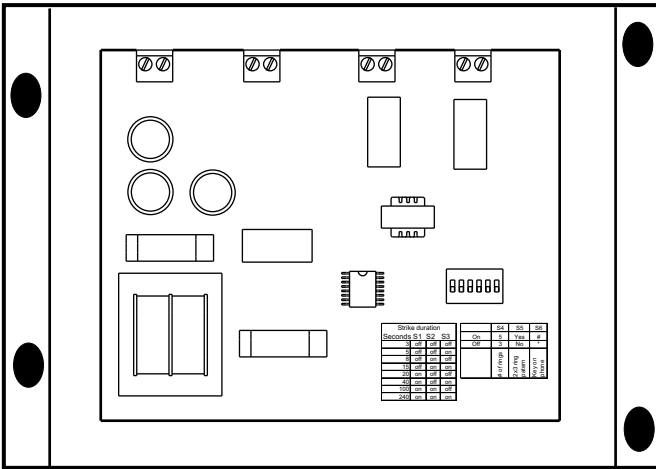

TE-111 Telephone Entry Controller

The **TE-111** provides communication between the front door and any phone in the house. When a visitor presses the doorbell button the phones in the house will respond with a distinctive ring. The home owner can then speak to the visitor by answering any of the ringing phones in the house.

Basic Connection

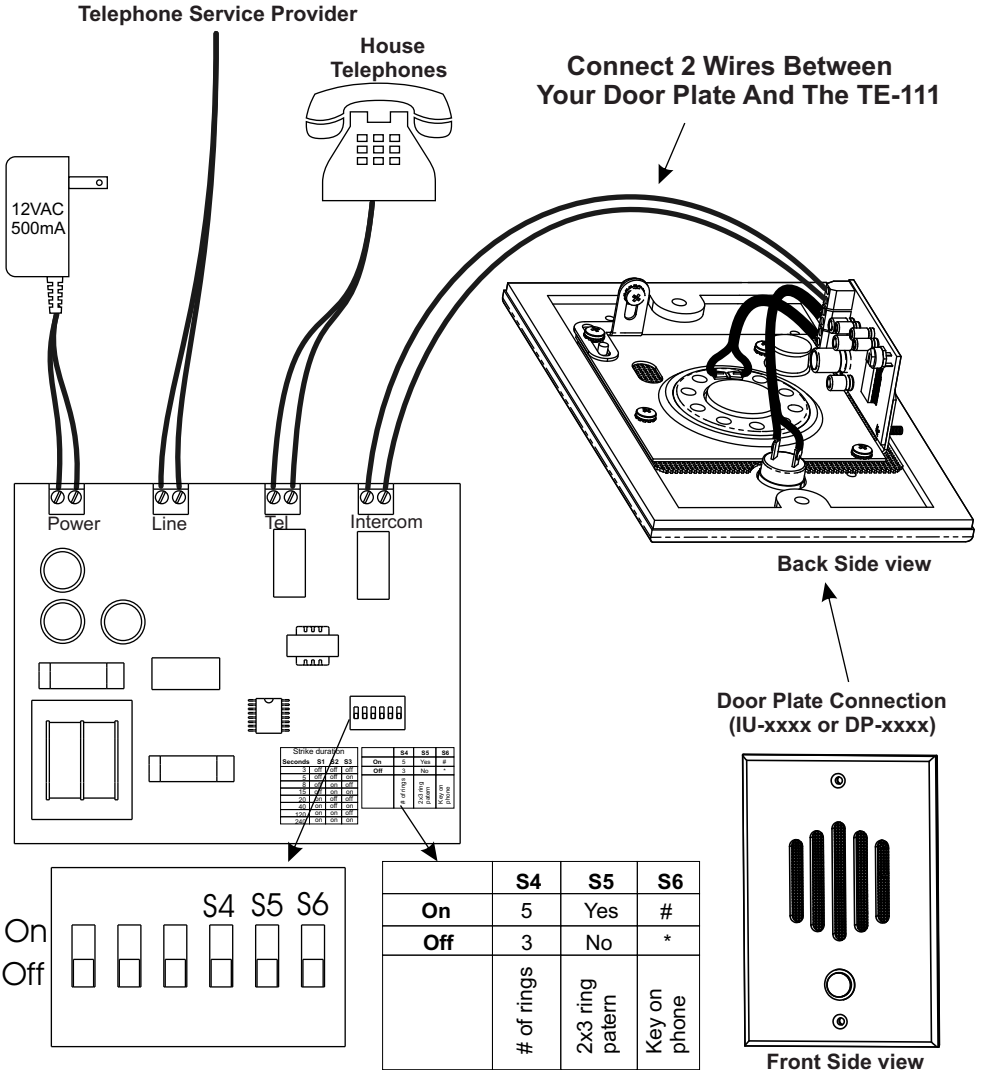

Basic Installation Steps:

1. Mount the TE-111 near the main telephone distribution center of the house and attach the telephone line from the service provider to the connection labeled "Line".
.
2. Connect the main house phone distribution system to the wire terminals labeled "Tel".
3. Connect the TE-111 to the Chanel Vision DP or IU series door plate. Note: The correct companion board to use is 300-001 (300001)
4. Connect power supply.

Basic Configuration:

Configure switches S4 and S5 to select the desired ring pattern.

Set switch S6 to either # or * to determine which key will activate the system.

Basic Operation:

When you hear the distinctive ring pattern selected above:


within 20 seconds - simply pick up the telephone to be connected to the door speaker.

after 20 seconds - pick up the telephone and press ## (or **) to be connected to the door speaker.

If you are already on the phone when the doorbell button is pressed you will hear a call waiting tone. Simply press ## (or **) to put your call on hold while you are connected to the door speaker. Press ## (or **) to return to your call.

TE110DS Connection Diagram

The **TE110DS** is an optional relay that works with the TE-111 to control an electronic opener.

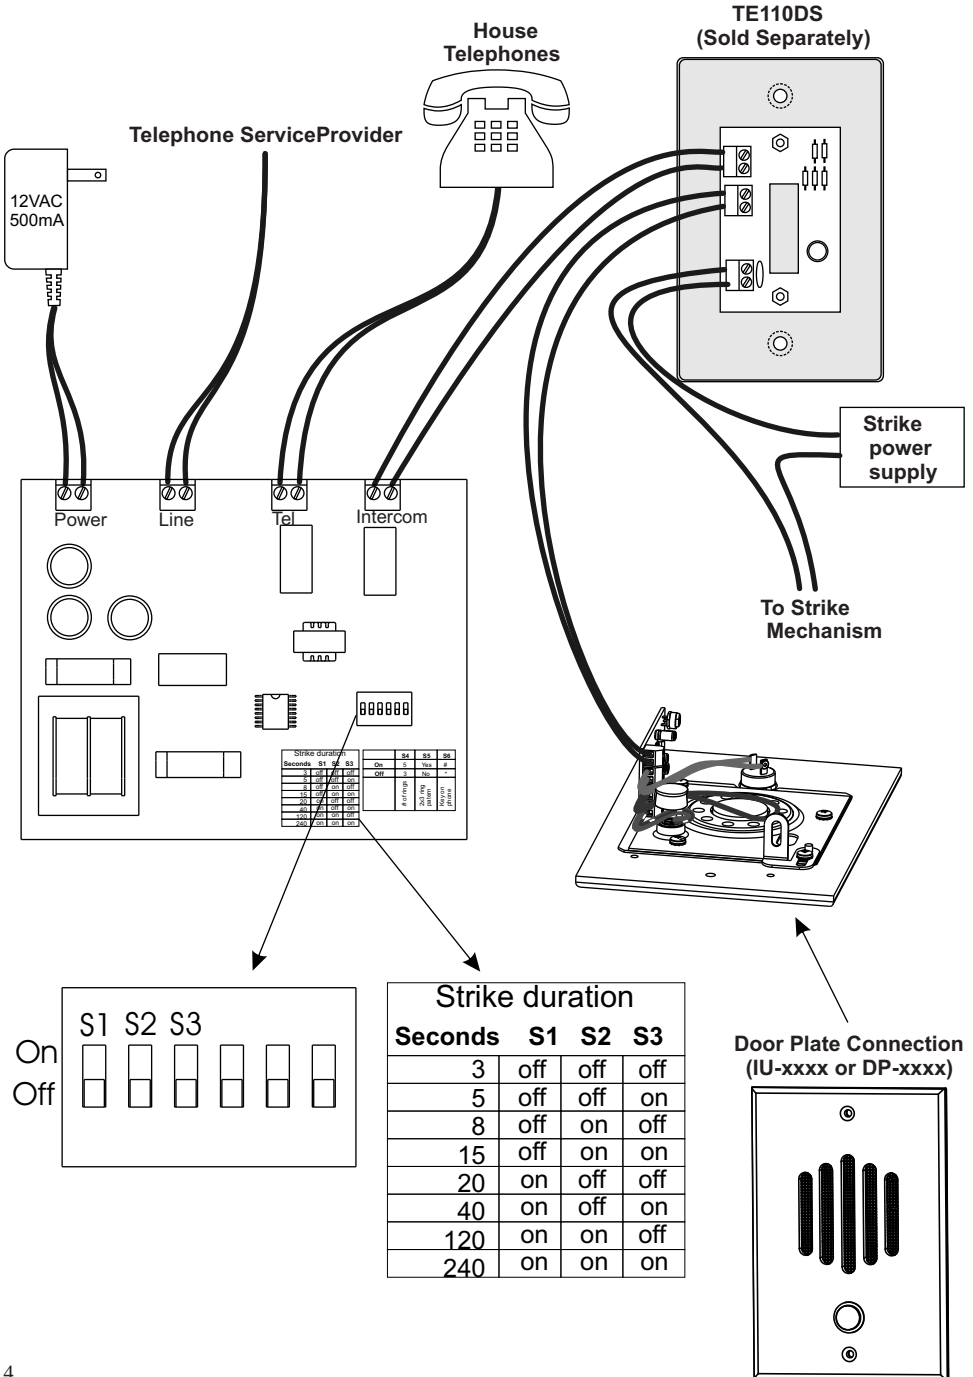

TE110DS Installation Steps:

1. Complete Basic installation.
2. Connect the TE110DS (sold separately) in-line between the main board and small board.

Basic Configuration:


Configure switches S1, S2 and S3 to select the duration of the TE110DS relay closure.

Basic Operation:


To close the door strike relay while you are already communicating with the door speaker, press #7 (or *7).

To close the door strike relay when you are not communicating with the door speaker, press ## (or **) and then press #7 (or *7).

TE110DS Connection Details

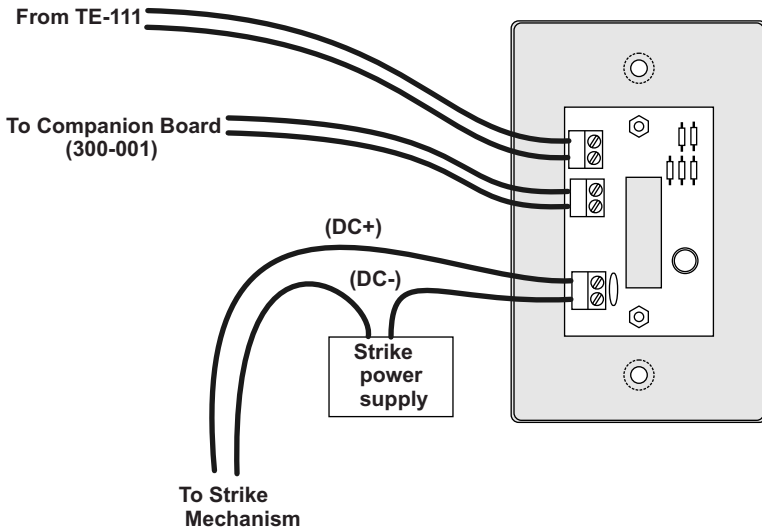

Front Door - Back Door Application

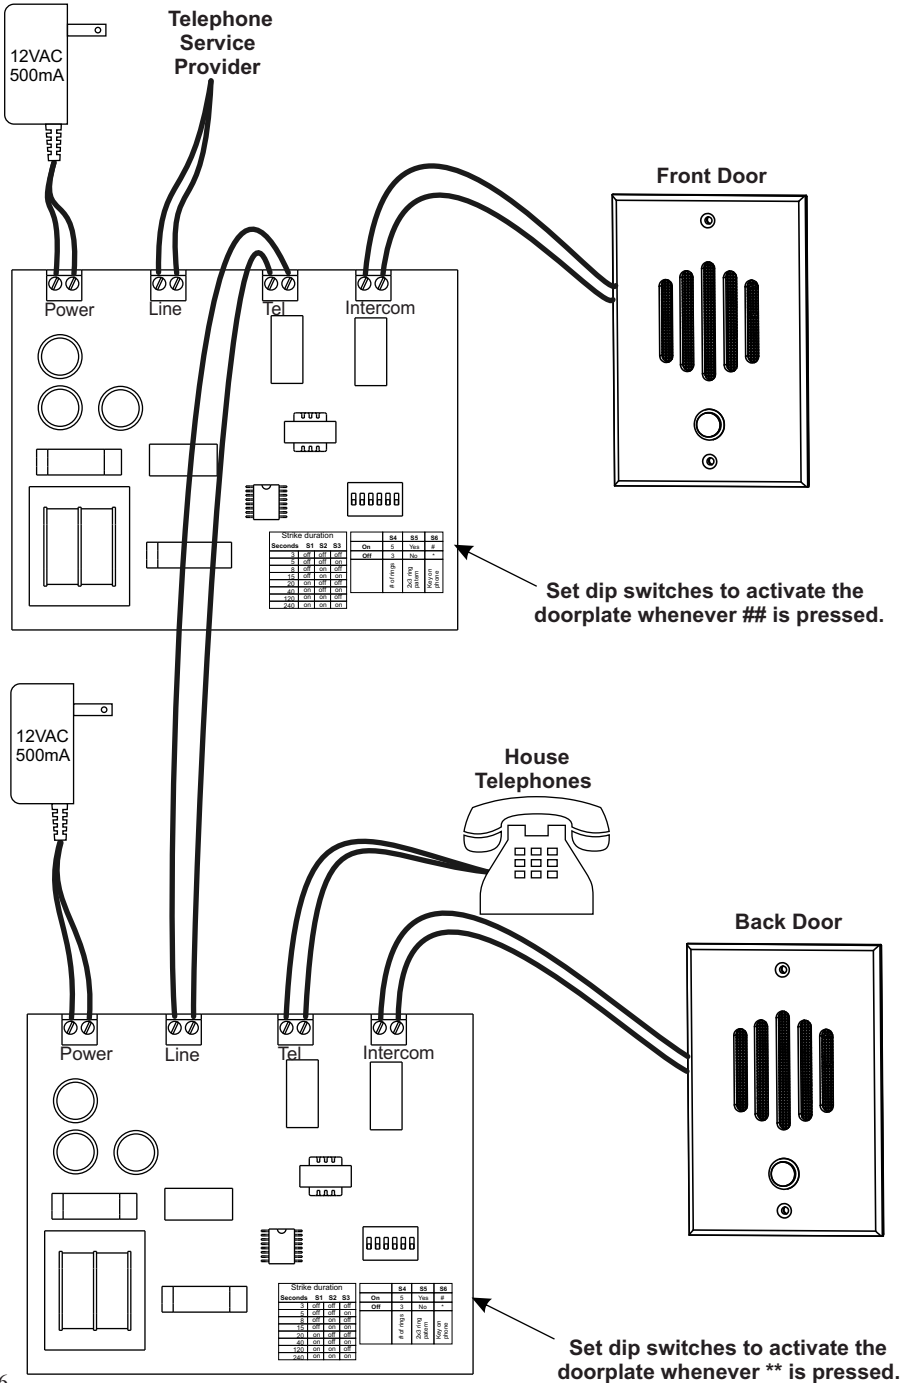

Two Door Application:

1. Complete the basic installation, setting the TE-111 to respond to the # key on your telephone.
2. Connect the house phones output from the first TE-111 to the line in on the second TE-111.
3. Configure the second TE-111 to respond to the * key on your telephone.
4. Set both units for different distinctive ring patterns.

Two Door Operation:

When you hear the distinctive ring pattern selected above:

within 20 seconds - simply pick up the telephone to be connected to the door speaker.

after 20 seconds - pick up the telephone and press ## to be connected to the front door speaker, or ** to be connected to the back door speaker.

Specifications:

REN:	>5
Power Supply:	12VAC 500mA
Dimensions:	
TE-111:	6.5" x 5.0" x 2.4"



1 Year Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for one year from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser when purchased through an authorized reseller. A purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (714) 424-6500 or e-mailing techsupport@channelvision.com

A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

Channel Vision products are not intended for use in medical, lifesaving, life sustaining or critical environment applications. Channel Vision customers using or selling Channel Vision products for use in such applications do so at their own risk and agree to fully indemnify Channel Vision for any damages resulting from such improper use or sale.



234 Fischer Avenue, Costa Mesa, California 92626 USA
(714)424-6500 • (800)840-0288 • (714)424-6510 fax
email: techsupport@channelvision.com