

# ICIP-DW212

## 2 MP Full HD WiFi Outdoor/Indoor Mini Dome Camera

---



You asked for WiFi Cameras and we delivered. Throw away the CAT-5 and enter the world of easy installations and wireless nirvana. Check out the ICIP-DW212, a 2MP wireless dome camera with all the bells and whistles you have come to expect. This camera features Day/Night capability with a robust IR beam out to 100 feet of nighttime viewing. It has many extras like digital wide dynamic range, backlight compensation, and noise reduction. The camera runs on 12V and is IP66 rated which means it can handle heavy seas and dust storms.

### Features

- 2 Megapixel Resolution
- 3.6mm Fixed Lens
- Outdoor/Indoor Micro Size Dome
- Built-in WiFi
- Max 30fps@720P (1280x720)
- DWDR, 3DNR, AWB, AGC, BLC
- Network Access: Web browsers, SmartICRSS, ICRSS Pro & IC View
- 12VDC Power

# ICIP-DW102

## Specifications


<b>Camera</b>	
Image Sensor	1/3" 3Megapixel progressive scan CMOS
Effective Pixels	2048(H)x1536(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 (4) ~1/10000
Min. Illumination	0.1Lux/F1.8(color), 0Lux/1.8(IR on)
S/N Ratio	More than 50dB
Video Output	N/A
<b>Camera Features</b>	
Max. IR LEDs Length	30m
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC /HLC /DWDR
White Balance	Auto
Gain Control	Auto/Manual
Noise Reduction	2D
Privacy Masking	Up to 4 areas
<b>Lens</b>	
Focal Length	3.6mm
Max Aperture	F1.8(F2.0/F1.9)
Focus Control	Manual
Angle of View	H:71.9°(90°/45°)
Lens Type	Fixed
Mount Type	Board-in Type
<b>Video</b>	
Compression	H.264 / MJPEG
Resolution	1080P(1920x 1080)/720P(1280x 720)/D1(704x 576/704x 480)/CIF(352x 288/352x 240)
Frame Rate: Main Stream	1080P/720P (1 ~ 25/30fps)
Frame Rate: Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 56K ~ 8192Kbps
<b>Audio</b>	
Compression	N/A
Interface	N/A
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	Wi-Fi(802.11b/g/n)
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF ,CGI

Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	NA
RS485	NA
Alarm	NA
PIR Sensor Range	NA
General	
Power Supply	DC12V
Power Consumption	<4W
Working Environment	-30°C~+50°C, Less than 95%RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ110× 54mm
Weight	0.39kg

# ICIP-DW102

---

## Dimensions (mm)

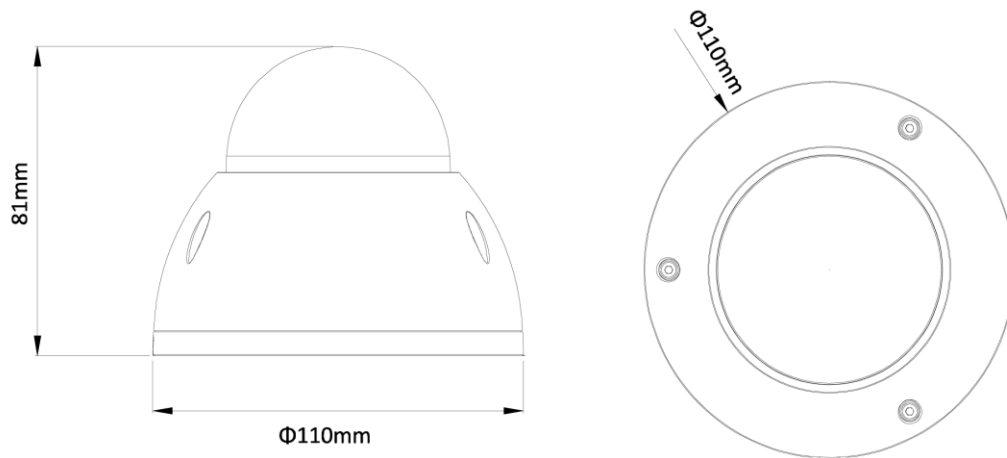

## Optional Accessories



**MNT-JUNCTION BOX 2**



**MNT-IPMINIDOME-WALL**



**MNT-JUNCTION BOX 3**

---

IC Realtime, LLC

3050 North Andrews Avenue Extension, Pompano Beach, FL 33064

(866) 997-9009

[www.icrealtime.com](http://www.icrealtime.com)

Designs and specifications subject to change without notice. Copyright 2015 IC Realtime, LLC. All rights reserved.